



**Digicode**<sup>marque</sup>  
brand **KEYPADS**


▶ WITH REMOTE ELECTRONICS

**KCIN** Surface-mount keypad - Stainless steel



- **Stainless steel.**
- **Backlit keys.**
- **Compact.**
- **From 2 to 3 relays.**
- **Surface mount.**
- **Free voltage.**
- **Mounting with Diax® screws.**
- **PCB of remote electronics protected with a varnish coating.**
- **100 user codes customisable by each user.**

**INOX**

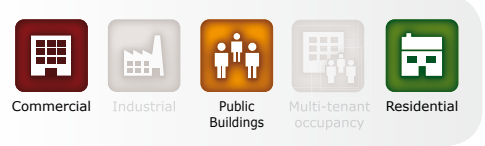


**PATENTED BREVETÉ**



**Recommended power supplies**


ARD12    BS60

- RoHS
- WEEE
- Environmental tests: vibrations
- Environmental test: Salt spray
- IP64
- CE Certification
- 25°C to +70°C




CODE	REFERENCE	DESCRIPTION
F020100053	KCIN	STAINLESS-STEEL DIGICODE® KEYPAD - 2 RELAYS
F020100055	KCIN3	STAINLESS-STEEL DIGICODE® KEYPAD - 3 RELAYS

Narrow surface-mount keypad - Stainless steel **PROFIL100EC**

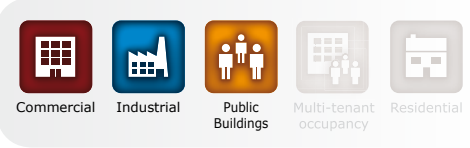

- **Stainless steel.**
- **Narrow: Ideal for installation on aluminium profile.**
- **Backlit keys.**
- **2 relays.**
- **Recommended for activating and deactivating your alarm system.**
- **Surface mount.**
- **Free voltage.**
- **Mounting with Diax® screws.**
- **PCB of remote electronics protected with a varnish coating.**
- **100 user codes customisable by each user.**



**PATENTED BREVETÉ**



**INOX**

- RoHS
- WEEE
- IP64
- CE Certification
- Environmental tests: vibrations
- 25°C to +70°C

**Recommended power supplies**

ARD12    BS60

- Audible and visual feedback.
- Dimensions (L x W x D): 165 x 43 x 27mm.
- Power supplies:
  - 12 V to 24V ac,
  - 12 V to 48V dc.
- Consumptions: 30 to 100mA.

CODE	REFERENCE	DESCRIPTION
F020100061	PROFIL100EC	STAINLESS-STEEL DIGICODE® KEYPAD - 2 RELAYS

\* Refer to Limited Lifetime Warranty Conditions.