




STAND-ALONE ACCESS CONTROL

PROMI500 - DGPROX STAND ALONE CONTROLLER READER

▶ 1-DOOR CONTROLLER + PROXIMITY CARD READER

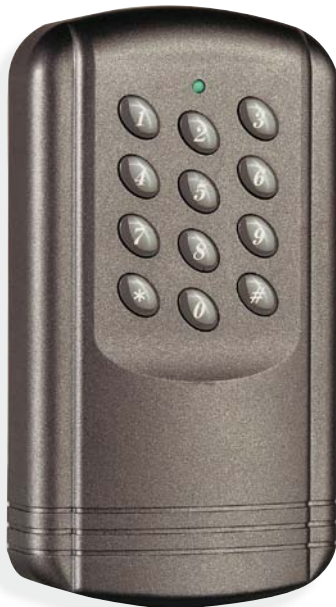

PROMI500



DGPROX



- 1-door + Proximity card reader.
- 2 relays outputs.
- 500 proximity tags and 500 user codes.
- Self-contained electronics.
- Tamper switch.
- 3 operating modes:
 - Card + PIN (double security),
 - Card only,
 - Card or PIN.
- Audible and visual feedback (buzzer & LED).

- Dimensions (L x W x D):
 - PROMI500 = 145 x 80 x 28mm,
 - DGPROX = 145 x 86 x 25mm,
- Material:
 - PROMI500 = ABS,
 - DGPROX = polycarbonate.
- 12-key keypad + proximity reader.
- 1 master code 5 digits.
- Output: 2 relays NO/NC contacts 3A/125V ac one of which is to open the door and one to report the alarm.
- Programmable relay output (1 to 99 seconds).
- Optional: 1 auxiliary reader remotely installed up to 50m.
- E2PROM memory.
- 1 door contact input (open or closed).
- 12V ac/dc power supply.
- Consumption: 250mA.

Complies with European R&TTE directive 99/5/EC and harmonised standards: ETS 301 489 and ETS 300-330-1-Ed 2001. Compliant with applicable EMC standards: EN 50133, EN 50130-4.

RoHS

WEEE

IP53

R&TTE Certification

CE Certification

-10°C to +70°C

Certified FCC CFR 47 Part 15 compliant

Recommended power supplies



CODE	REFERENCE	DESCRIPTION
F010100009	PROMI500	PROXIMITY STANDALONE CONTROLLER 500 TAGS - 1 DOOR
F010100023	DGPROX	PROXIMITY STANDALONE CONTROLLER 500 TAGS - 1 DOOR

* Refer to Limited Lifetime Warranty Conditions.