

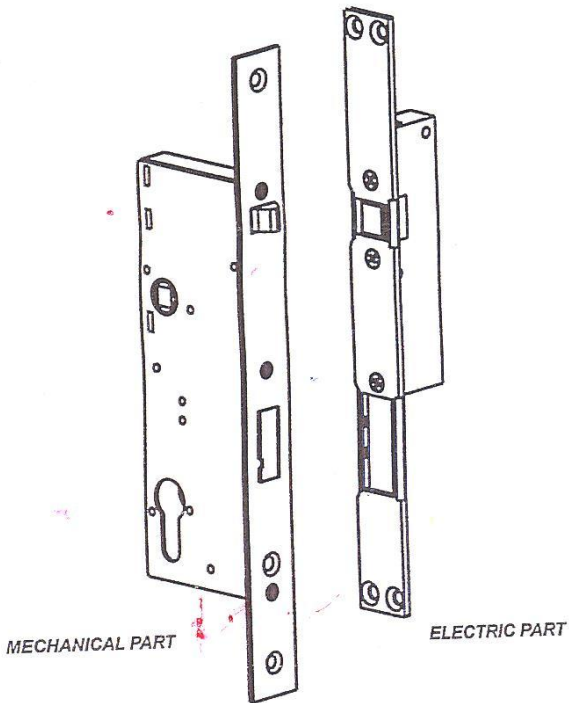
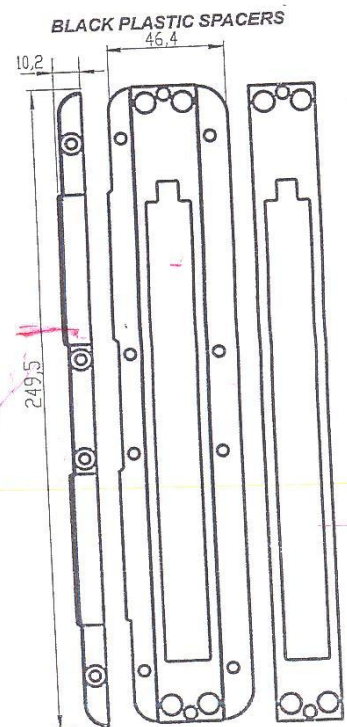
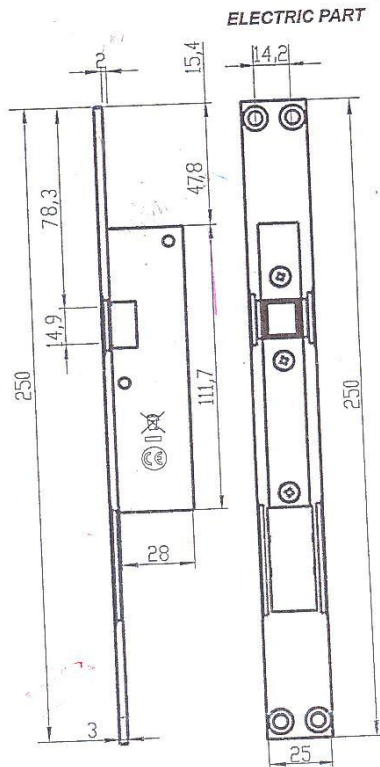


The distance between both parts must be 3-4 mm. We recommend to use the black plastic spacers to install the electric part.

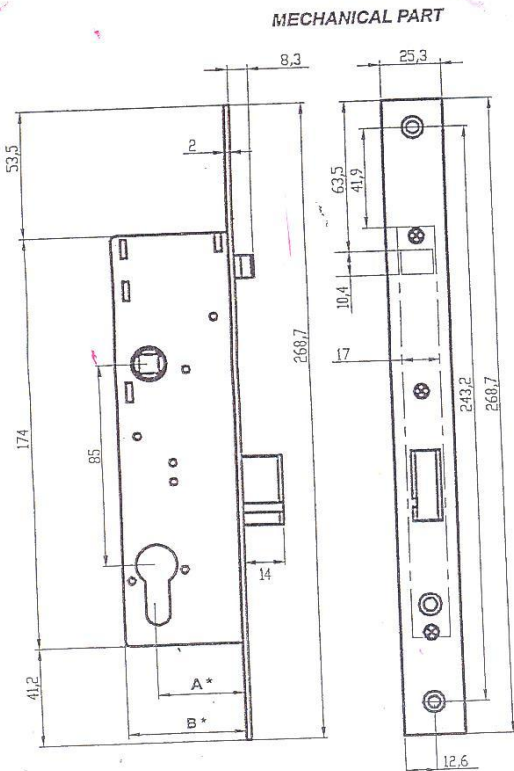

PATENT PENDING

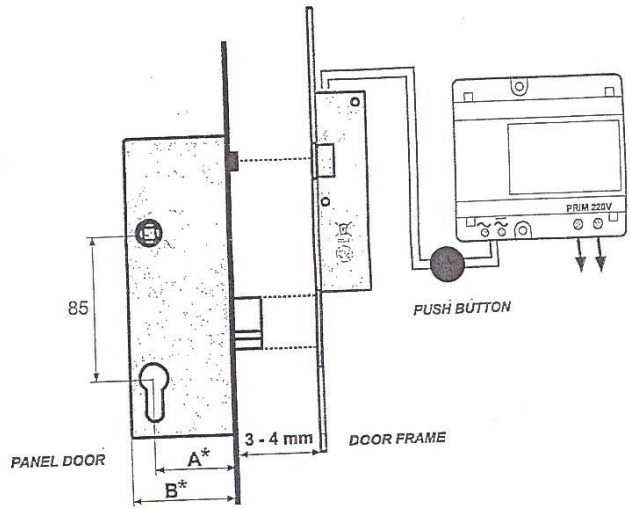

## ELECTRIC FEATURES

Power supply voltage	12 Vac / dc	24 Vac / dc
Current consumption	Vac - 990 mA Vdc - 1.350 mA	Vac - 600 mA Vdc - 710 mA
Ohms	8 ohm	32 ohm
Nominal operating voltage	+/- 1 V	+/- 1 V
Operatin temperature range	- 10 °C / 50 °C	- 10 °C / 50 °C

